


HSF

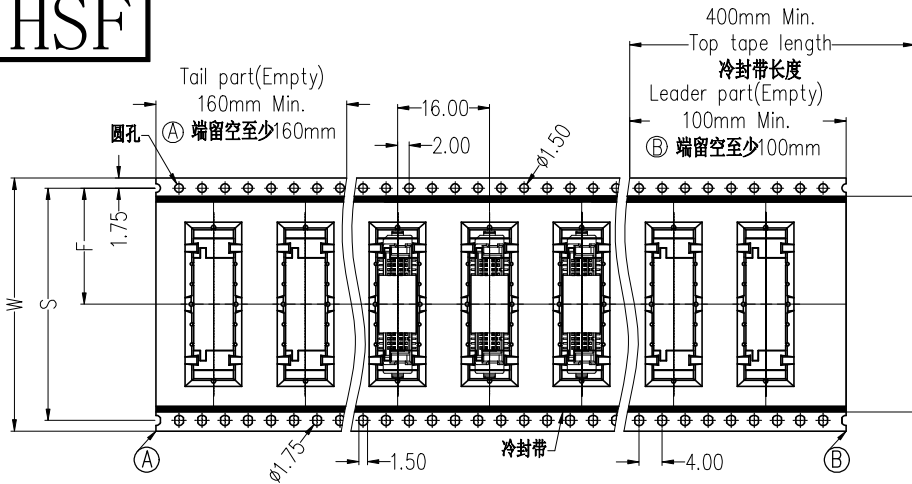

包装时产品卷入方向

客户安装时拉出方向
Customer pull out direction

白色小标签

剖视图

No.1:

产品包装前,注意载带要留空160mm以上
将产品放入载带凹槽后,用盖带封装,
注意:盖带与承载带的拉力30g-120g

环保大标签

黄色打包带

白色小标签

外箱: CTN-18K

内箱: CTN-18E

No.4:

封箱, 打包, 贴标签。

No.3:

将内箱装入外箱(3内箱/外箱)
注意统一标签方向

No.2:

将卷盘套上PE-32防水袋,
放入1包干燥剂,
真空机封口后装入内箱,
用封箱胶封装好,并贴上标签。

Pin	载带料号	W	S	F	PCS/Reel	PCS/内箱	PCS/外箱
20P	TR3615-FN020M07802	44.0±0.30	40.40±0.10	20.20±0.15	450	900	2700
30P	TR3615-FN030M07802	44.0±0.30	40.40±0.10	20.20±0.15	450	900	2700
40P	TR3615-FN040M07802	44.0±0.30	40.40±0.10	20.20±0.15	450	900	2700
50P	TR3615-FN050M07802	44.0±0.30	40.40±0.10	20.20±0.15	450	900	2700
60P	TR3615-FN060M07802	56.0±0.30	52.40±0.10	26.20±0.15	450	450	1350
70P	TR3615-FN070M07802	56.0±0.30	52.40±0.10	26.20±0.15	450	450	1350
80P	TR3615-FN080M07802	56.0±0.30	52.40±0.10	26.20±0.15	450	450	1350
90P	TR3615-FN090M07802	72.0±0.30	68.40±0.10	34.20±0.15	450	450	1350
100P	TR3615-FN100M07802	72.0±0.30	68.40±0.10	34.20±0.15	450	450	1350
120P	TR3615-FN120M07802	88.0±0.30	84.40±0.11	42.20±0.16	450	450	1350
140P	TR3615-FN140M07802	88.0±0.30	84.40±0.11	42.20±0.16	450	450	1350

变更 记录						工程图 ENGINEERING	绘图 DRAW	苏珊	2020/04/29	SCALE	FIT	WCON WCON ELECTRONICS (GUANGDONG) CO., LTD	
						X.X	±0.30	设计 DESIGN		UNIT	mm		
						X.XX	±0.20	审核 CHECK		SIZE	A4		
	A0	2020/04/29		NEW	-----	X.XXX	±0.10	核准 APPROVE		SHEET	1/1	料号 PART NO.	3615-SXXX-065XXR01
	版次 REV	日期 DATE		变更说明 MODIFICATION DESCRIPTION	变更 CHANGE	核准 APPROVE	Angle DIM	± 2° TOL		PROJ.	品名 TITLE:	0.8mm BTB Female, SMT W/T POST&CAP&LOCK, H2=6.55mm 卷装规范	