
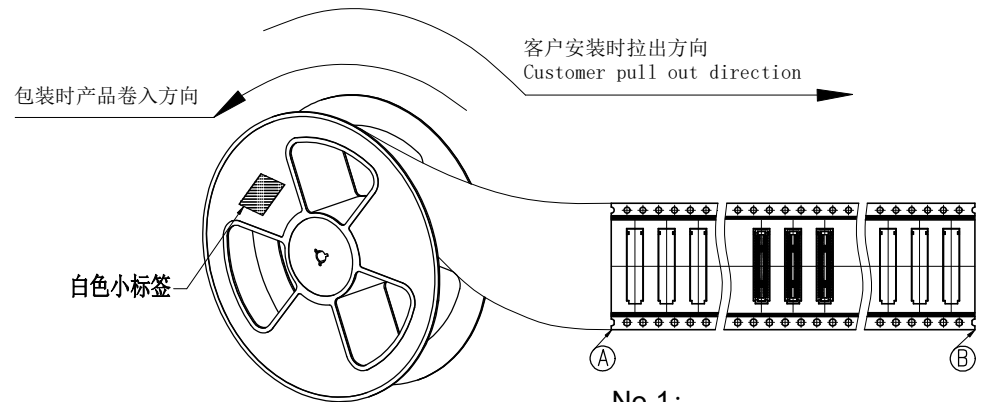



HSF

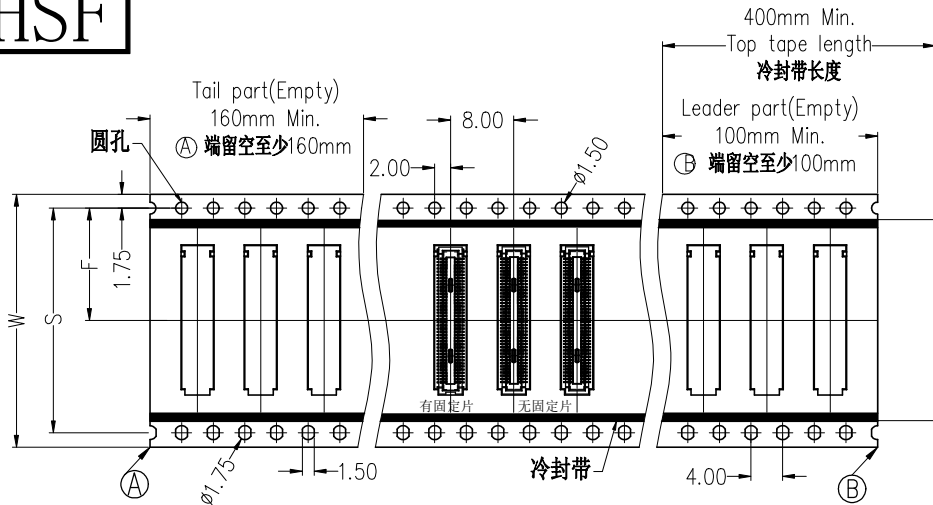

No.1:

产品包装前, 注意载带要留空160mm以上
将产品放入载带凹槽后, 用盖带封装,
注意: 盖带与承载带的拉力30g-120g


环保大标签 黄色打包带



外箱: CTN-18K

No.4:

封箱, 打包, 贴标签。

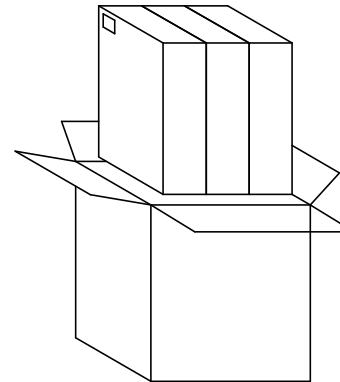

白色小标签

内箱: CTN-18E

No.3:

将内箱装入外箱
(3内箱/外箱, XXP/外箱)
注意统一标签方向

No.2:

将卷盘套上PE-32防水袋,
放入1包干燥剂,
真空机封口后装入内箱,
用封箱胶封装好, 并贴上标签。

Pin	载带新料号	W	S	F	PCS/Reel	PCS/内箱	PCS/外箱
10P	TR3630-FN010M01401	16.0±0.30	/	7.50±0.15	3950	15800	47400
12P	TR3630-FN012M01401	16.0±0.30	/	7.50±0.15	3950	15800	47400
20P	TR3630-FN020M01401	16.0±0.30	/	7.50±0.15	3950	15800	47400
24P	TR3630-FN024M01401	16.0±0.30	/	7.50±0.15	3950	15800	47400
30P	TR3630-FN030M01401	24.0±0.30	/	11.50±0.15	3950	11850	35550
34P	TR3630-FN034M01401	24.0±0.30	/	11.50±0.15	3950	11850	35550
40P	TR3630-FN040M01401	24.0±0.30	/	11.50±0.15	3950	11850	35550
44P	TR3630-FN044M01401	24.0±0.30	/	11.50±0.15	3950	11850	35550
50P	TR3630-FN050M01401	24.0±0.30	/	11.50±0.15	3950	11850	35550
60P	TR3630-FN060M01401	24.0±0.30	/	11.50±0.15	3950	11850	35550
70P	TR3630-FN060M01401	32.0±0.30	28.40±0.10	14.20±0.15	3950	7900	23700
80P	TR3630-FN080M01401	32.0±0.30	28.40±0.10	14.20±0.15	3950	7900	23700
90P	TR3630-FN090M01401	32.0±0.30	28.40±0.10	14.20±0.15	3950	7900	23700
100P	TR3630-FN100M01401	44.0±0.30	40.40±0.10	20.20±0.15	3950	7900	23700

变更记录

						工程图 ENGINEERING	绘图 DRAW	苏 珊	2021/04/26	SCALE	FIT	WCON WCON ELECTRONICS (GUANGDONG) CO., LTD	
						X.X	±0.30	设计 DESIGN		UNIT	mm		
						X.XX	±0.20	审核 CHECK		SIZE	A4		
						X.XXX	±0.10	核准 APPROVE		SHEET	1/1		
A0	2021/04/26		NEW	-----	-----	Angle	± 2°			PROJ.	1/1	料号 PART NO.	3630-SXXX-014GXR0X
版次 REV	日期 DATE		变 更 说 明 MODIFICATION DESCRIPTION	变 更 CHANGE	核 准 APPROVE	DIM	TOL					品名 TITLE:	0.40mm BTB 母座, XXP SMT, 有/无固定片 H=1.15 卷装规范