


HSF

NOTES:


Current Rating:3AMP
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact plating:Au or Sn Over Ni
Insulator Material:PBT+30%G.F(UL94V-0)


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

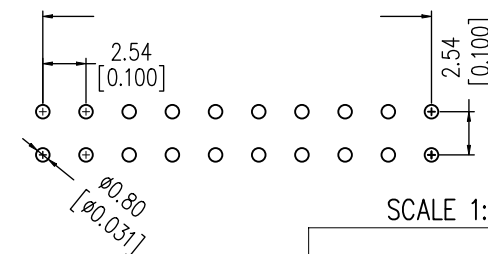


SCALE 1:3




10PIN



14PIN



16~24PIN



26~64PIN

Ordering Information

3113-XX S XX B K00 X 1

No. of Pins

10P 30P
14P 34P
16P 40P
20P 50P
24P 60P
26P 64P

Contact Plating



S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin

Color Insulator

B=Black

Packing:

A=Tray
T=Tube

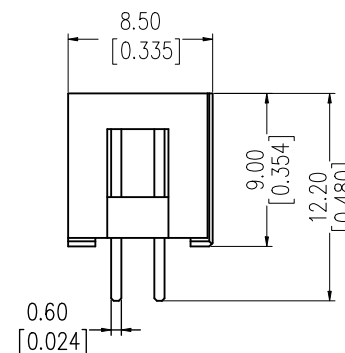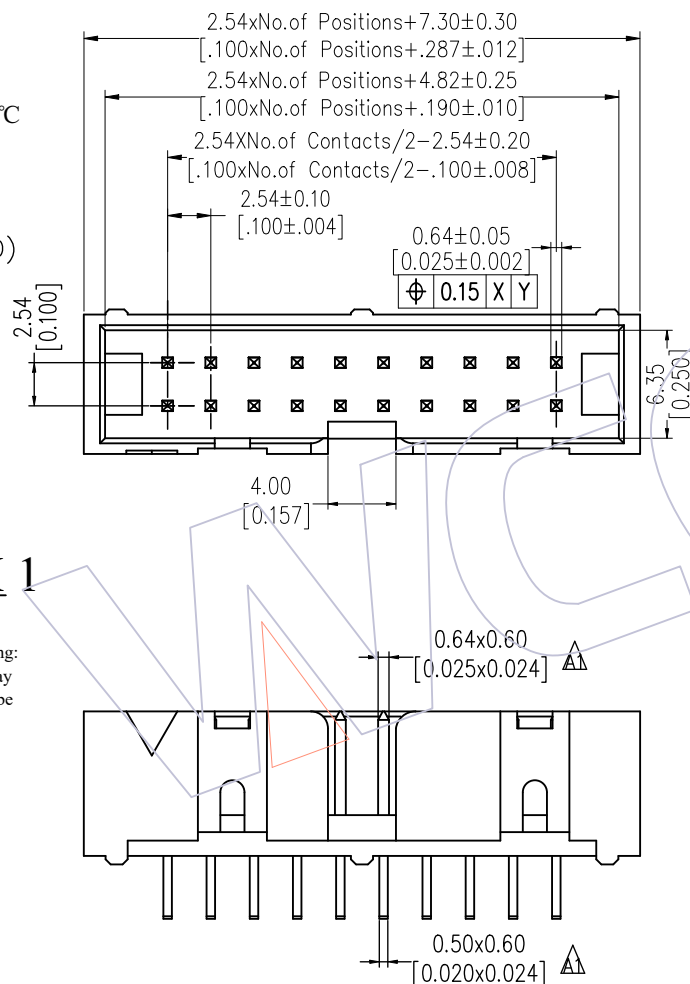

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW William Chen	DATE 15/03/30	SCALE UNIT	FIT mm	PART NO. 3113-XXSXXBK00X1	TITLE: 2.54Pitch Box Header
				X.X	±0.40						
A2	15/03/30	Modify Drawing	—	X.XX	±0.25	CHECK	DATE	SIZE	A4	Customer NO.	
A1	11/12/22	add DIM	—	X.XXX	±0.15	APPROVE	DATE	SHEET	1/1		
A0	11/06/16	NEW	—	Angle	± 3°			PROJ.			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL						

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com