

NOTES:

1. Body material: PBT+G.F, UL94 V-0
2. Contact material: Phosphor bronze,
Plated: Gold Flash/Ni
3. Pin material: Brass, Plated: Gold Flash
4. Screw material: Steel,Ni Plated
5. Rated Voltage: 300V
6. Rated Current: 10A
7. Wire Range:14-22AWG
8. Screw Torque:7.0 lbf.in
9. Contact Resistance: 8mΩ Max
- 10.Insulation Resistance: DC1000V 1000MΩ Min
- 11.Power-Frequency Withstand Voltage: AC2500V/1min
- 12.Impulse Withstand Voltage: 3000V
- 13.Operation Temperature:-40℃ to +120℃

Ordering Information:

BH762 - 01- XX - X - G0 - S0 X

No. Pin Per Row
06-21P

Contact Plated:
G0=Gold Flash



Color:
G=Dark Grey
W=Grey White
T=Light Grey

1=W/T WCON
2=W/O WCON

Product Data Sheet

2*13	108.27±0.50	91.44±0.50	48.42±0.40	2*21	169.23±0.50	152.40±0.50	78.90±0.50
2*12	100.65±0.50	83.82±0.50	48.42±0.40	2*20	161.61±0.50	144.78±0.50	78.90±0.50
2*11	93.03±0.50	76.20±0.50	40.80±0.40	2*19	153.99±0.50	137.16±0.50	71.28±0.50
2*10	85.41±0.50	68.58±0.50	40.80±0.40	2*18	146.37±0.50	129.54±0.50	71.28±0.50
2*9	77.79±0.40	60.96±0.40	33.18±0.30	2*17	138.75±0.50	121.92±0.50	63.66±0.40
2*8	70.17±0.40	53.34±0.40	33.18±0.30	2*16	131.13±0.50	114.30±0.50	63.66±0.40
2*7	62.55±0.40	45.72±0.30	25.56±0.30	2*15	123.51±0.50	106.68±0.50	56.04±0.40
2*6	54.93±0.40	38.10±0.30	25.56±0.30	2*14	115.89±0.50	99.06±0.50	56.04±0.40
PIN	A	B	C	PIN	A	B	C






Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

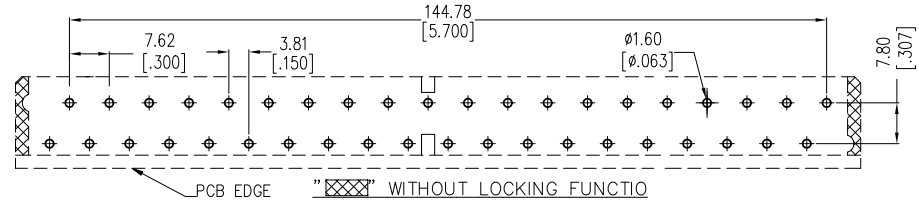

W/O WCON



W/T WCON

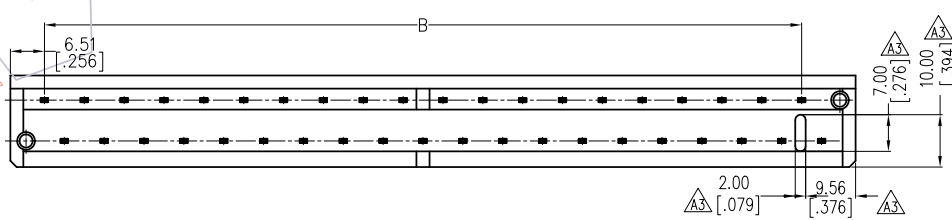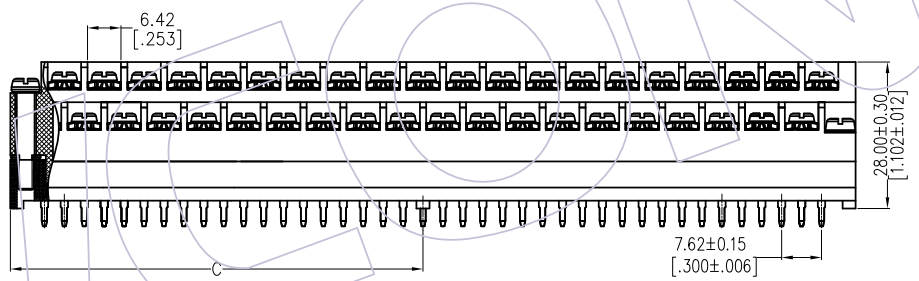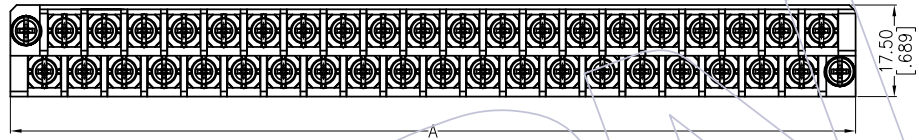

SECTION A-A

A5	2021/04/08	Add UL Logo & Product Data Sheet	XSR	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A4	2019/07/25	ADD Light Grey Color&TYPE 2	XSR	X.X ±0.40	XSR	2021/04/08	UNIT	mm	BH762-01-XX-X-G0-S0X
A3	2014/11/18	Modify	---	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 7.62Pitch*7.80mm,Double-Row, W17.5*H28.0mm,DIP=3.4 Barrier Terminal Blocks
A0	2011/11/29	NEW	---	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3° DIM TOL			PROJ.		

WCON

Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
Tel: +86 769 85358920 Tel: +86 512 57468408
Fax: +86 769 85358915 Fax: +86 512 57468468
E-mail: sales@wcon.com E-mail: salesks@wcon.com