

HSF



NOTES:

1. MATERIAL:
 - 1.1 HOUSING: PA66+30%GF(UL94V-0)
 - 1.2 COVER: PA66+30%GF(UL94V-0)
 - 1.3 TERMINAL: BRASS, MATTE TIN PLATED OVER NICKEL
2. ELECTRICAL:
 - 2.1 CURRENT RATING: 8 A
 - 2.2 VOLTAGE RATING: 300 V
 - 2.3 CONTACT RESISTANCE: 8 mΩ MAX.
 - 2.4 DIELECTRIC WITHSTANDING VOLTAGE: 2000V AC
 - 2.5 INSULATION RESISTANCE: 1000 MΩ MIN
3. ENVIRONMENTAL:
 - 3.1 OPERATION TEMPERATURE: -40°C TO +105°C
4. No. OF POSITIONS: 2~20
5. ALL MATERIALS SHOULD BE COMPLIANT TO ROHS




Ordering Information:

P M 350 - 3 R XX A SM 2 N
 M=Male No. of Pins (Per Row) 02-20P Contact Plated SM=Matte Tin N=W/O WCON
 Pitch 350=3.50 Color A=Green Series No.

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
02	3.50	12.30	17.70	12	38.50	47.30	52.70
03	7.00	15.80	21.20	13	42.00	50.80	56.20
04	10.50	19.30	24.70	14	45.50	54.30	59.70
05	14.00	22.80	28.20	15	49.00	57.80	63.20
06	17.50	26.30	31.70	16	52.50	61.30	66.70
07	21.00	29.80	35.20	17	56.00	64.80	70.20
08	24.50	33.30	38.70	18	59.50	68.30	73.70
09	28.00	36.80	42.20	19	63.00	71.80	77.20
10	31.50	40.30	45.70	20	66.50	75.30	80.70
11	35.00	43.80	49.20				

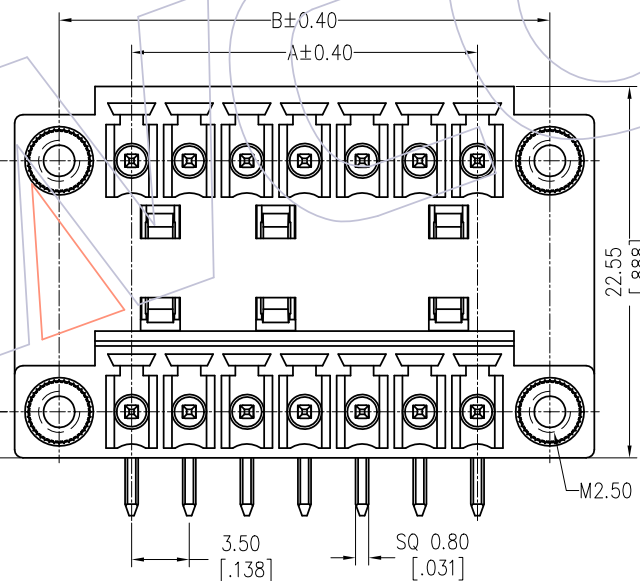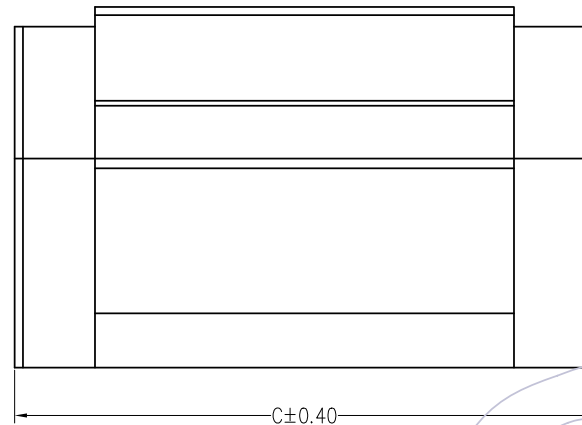

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

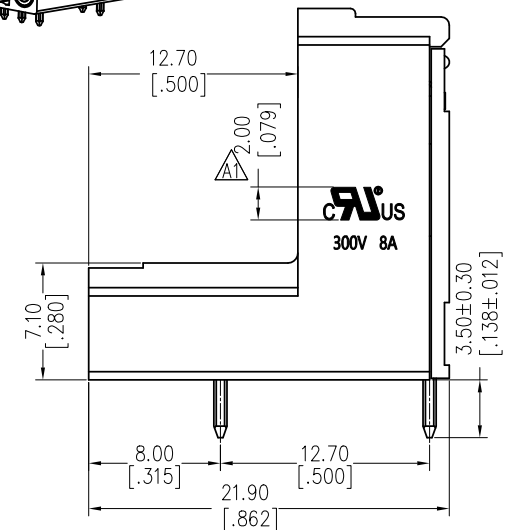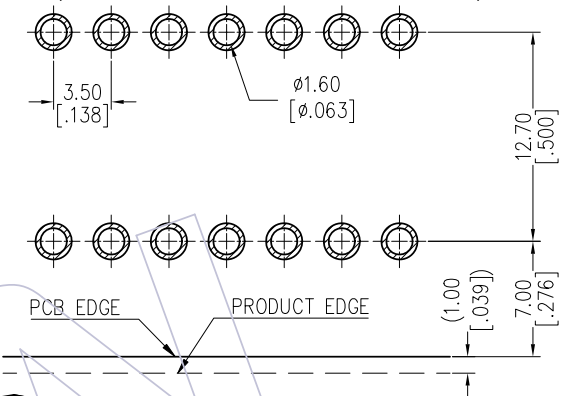

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2020/11/19	ADD UL LOGO	XSR
A0	2013/09/17	NEW	

OPERATION	DRAW	DATE	SCALE	FIT
X.X	±0.40	XSR	2020/11/19	mm
X.XX	±0.25	CHECK	DATE	inch
X.XXX	±0.15	APPROVE	DATE	A4
Angle	± 3°			1/1
DIM	TOL			PROJ.

PART NO.	TITLE:	CUSTOMER NO.
PM350-3RXXASM2N	3.50mm Pitch Male Pluggable Terminal Blocks Double Stagger Tier W/T Flange	

WCON	WCON-Dongguan	WCON-Kunshan
Http: www.wcon.com	Tel: +86 769 85358920	Tel: +86 512 57468408
	Fax: +86 769 85358915	Fax: +86 512 57468468
	E-mail: sales@wcon.com	E-mail: salesks@wcon.com