
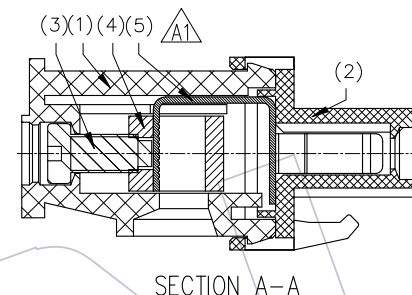
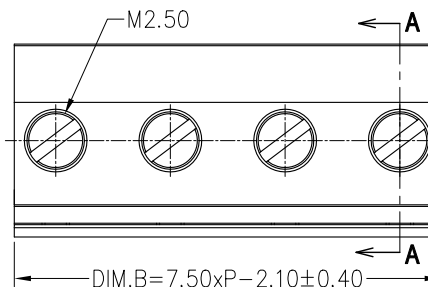


HSF

NOTES:

Rated Current: 15 AMP
Contact Resistance: 8 mΩ Max
Withstand Voltage: 2000 V AC/DC
Insulation Resistance: 1000 MΩ min
Operation Temperature: -40℃ to +105℃
Wire Range: 30~12 AWG
Wire Strip Length: 7 mm
Screw Counter Torsion Force: 4.4 lbf.in Min.

W/O WCON LOGO

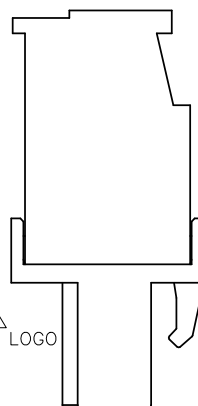




SECTION A-A

Ordering Information:


P F 750 - B XX A SM N 1 N

F=Female Pitch 750=7.50 No. of Pins 02-20P Contact Plated SM=Matte Tin Blank=W/T WCON Logo N=W/O WCON Logo


Color A=Green Type N=W/O Screw

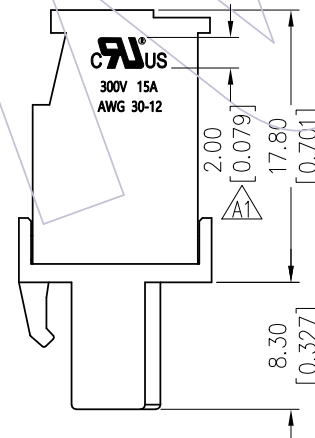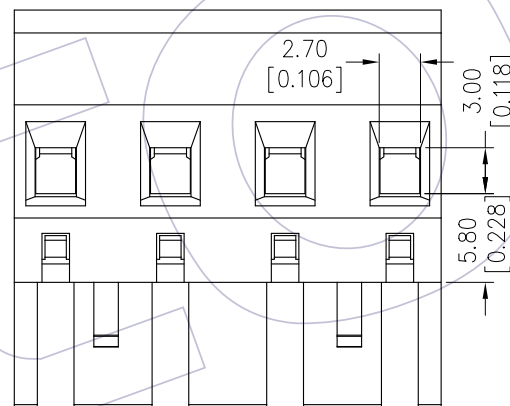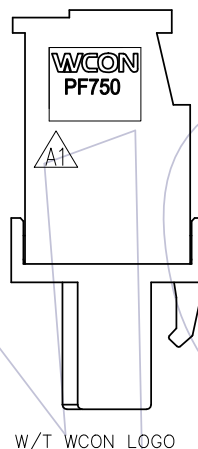

W/T WCON LOGO



PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	7.50	12.90	12	82.50	87.90
03	15.00	20.40	13	90.00	95.40
04	22.50	27.90	14	97.50	102.90
05	30.00	35.40	15	105.00	110.40
06	37.50	42.90	16	112.50	117.90
07	45.00	50.40	17	120.00	125.40
08	52.50	57.90	18	127.50	132.90
09	60.00	65.40	19	135.00	140.40
10	67.50	72.90	20	142.50	147.90
11	75.00	80.40			

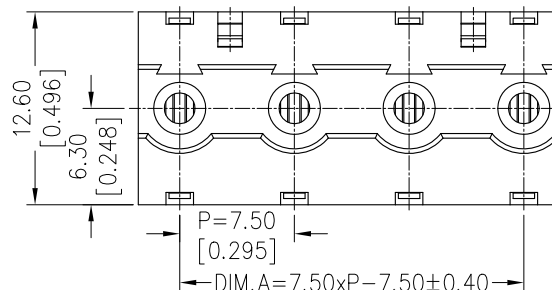

ITEM	TITLE	P/N	Q'TY	Material
(5)	Contact	TPT051-PSM001	N	C5191R-H T=0.4
(4)	Pin Block	BL025-1SNI01	N	C3604
(3)	Screw	MA025-1SXX01	N	C1018
(2)	Cover	HPC750-XXB1AN2	1	PA66 UL94-V0
(1)	Housing	HPF750-XXB1AN2(N)	1	PA66 UL94-V0

				OPERATION		DRAW XSR	DATE 2020/08/04	SCALE	FIT	PART NO. PF750-BXXASMN1(N) 	 Http: www.wcon.com	
				X.X	±0.40			UNIT	mm inch			TITLE: 7.50mm Pitch Female Pluggable Terminal Blocks
A1	2020/08/04	ADD LOGO;ADD W/O WCON LOGO P/N	XSR	X.XX	±0.25	CHECK	DATE	SIZE	A4			
A0	2013/11/08	NEW	Tsingsn	X.XXX	±0.15	APPROVE	DATE	SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°			PROJ.		Customer NO.		
				DIM	TOL						WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com