

HSF

NOTES:


Current Rating:10A
Voltage Rating:300V
Contact Resistance:8milliohm Max
Withstand Voltage:AC2000V
Insulation Resistance:1000Megohm Min
Operation Temperature: -40℃ to +105℃

Housing Material:PA66+30%GF(UL94V-0) $\Delta 2$
Contact Material:Brass




Ordering Information:

P M 508 - 1 R XX X SM 3 N

M=Male Pitch 508=5.08
Color A=Green B=Black G=Grey
No.of Pins 02-24P
Contact Plated SM=Matte Tin
Blank=W/T WCON N=W/O WCON

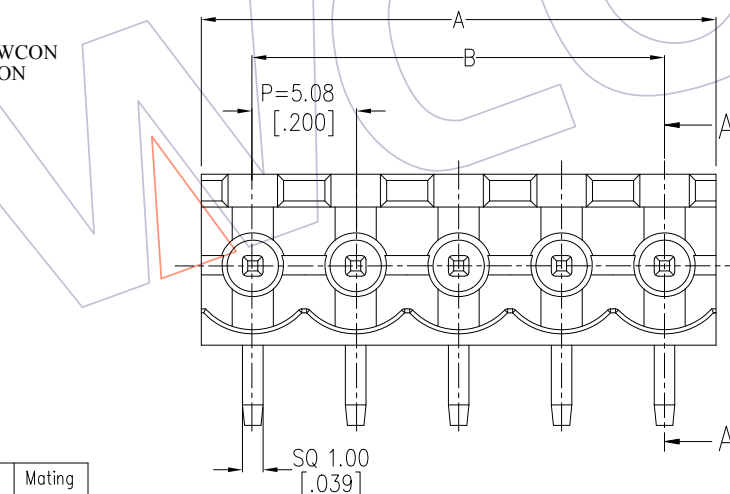

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

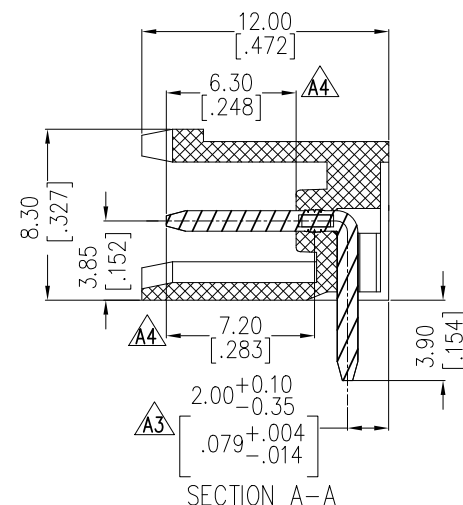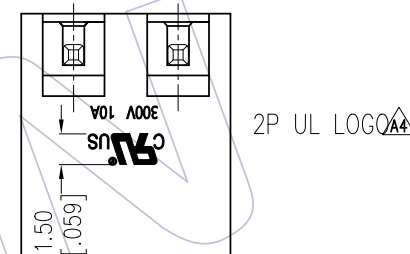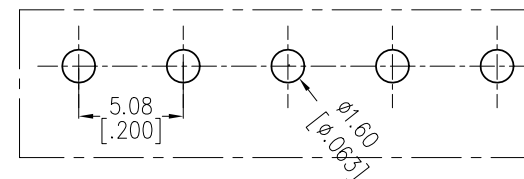

13P	66.04 ±0.30	60.96 ±0.30			
12P	60.96 ±0.30	55.88 ±0.30	24P	121.92 ±0.50	116.84 ±0.50
11P	55.88 ±0.30	50.80 ±0.30	23P	116.84 ±0.50	111.76 ±0.50
10P	50.80 ±0.30	45.72 ±0.30	22P	111.76 ±0.50	106.68 ±0.50
9P	45.72 ±0.30	40.64 ±0.30	21P	106.68 ±0.50	101.60 ±0.50
8P	40.64 ±0.30	35.56 ±0.30	20P	101.60 ±0.50	96.52 ±0.50
7P	35.56 ±0.20	30.48 ±0.20	19P	96.52 ±0.40	91.44 ±0.40
6P	30.48 ±0.20	25.40 ±0.20	18P	91.44 ±0.40	86.36 ±0.40
5P	25.40 ±0.20	20.32 ±0.20	17P	86.36 ±0.40	81.28 ±0.40
4P	20.32 ±0.20	15.24 ±0.20	16P	81.28 ±0.40	76.20 ±0.40
3P	15.24 ±0.20	10.16 ±0.20	15P	76.20 ±0.40	71.12 ±0.40
2P	10.16 ±0.20	5.08 ±0.10	14P	71.12 ±0.40	66.04 ±0.40
PIN	A	B	PIN	A	B

ITEM	Pitch	Mating
Standard	5.08	PF508
Alternate		

A4	2020/11/18	ADD UL LOGO & DIM; ADD W/O WCON SPEC & P/N; $\Delta 4$	XSR	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A3	2017/12/29	Modify DIM. 2.0±0.2 to 2.0 ^{+0.10} _{-0.35} $\Delta 3$	XSR	X.X ±0.40	XSR	2020/11/18	UNIT	mm	PM508-1RXXXSM3(N) $\Delta 1 \Delta 4$
A2	2013/06/05	Modify The Housing Material $\Delta 2$	XSR	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2011/06/08	NEW		X.XXX ±0.15			SHEET	1/1	5.08mm Pitch Male
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3°	APPROVE	DATE	PROJ.		Pluggable Terminal Blocks
				DIM TOL					Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com