

HSF

NOTES:

Current Rating: 10A
Voltage Rating: 300V
Contact Resistance: 8milliohm Max
Withstand Voltage: AC2000V
Insulation Resistance: 1000Megohm Min
Operation Temperature: -40℃ to +105℃

Housing Material: PA66+30%GF(UL94V-0) $\Delta 2$
Contact Material: Brass
Inlay Material: Brass




Ordering Information:

P M 508 - 1 S XX X SM 2 N

M=Male Pitch 508=5.08 No. of Pins 02-24P Color
A=Green Y=Yellow R=Red O=Orange U=Blue G=Grey(灰色429C)
Contact Plated SM=Matte Tin Blank=W/T WCON N=W/O WCON
Series No.


13P	76.20 ±0.30	60.96 ±0.30			
12P	71.12 ±0.30	55.88 ±0.30	24P	132.08 ±0.50	116.84 ±0.50
11P	66.04 ±0.30	50.80 ±0.30	23P	127.00 ±0.50	111.76 ±0.50
10P	60.96 ±0.30	45.72 ±0.30	22P	121.92 ±0.50	106.68 ±0.50
9P	55.88 ±0.30	40.64 ±0.30	21P	116.84 ±0.50	101.60 ±0.50
8P	50.80 ±0.30	35.56 ±0.30	20P	111.76 ±0.50	96.52 ±0.50
7P	45.72 ±0.20	30.48 ±0.20	19P	106.68 ±0.40	91.44 ±0.40
6P	40.64 ±0.20	25.40 ±0.20	18P	101.60 ±0.40	86.36 ±0.40
5P	35.56 ±0.20	20.32 ±0.20	17P	96.52 ±0.40	81.28 ±0.40
4P	30.48 ±0.20	15.24 ±0.20	16P	91.44 ±0.40	76.20 ±0.40
3P	25.40 ±0.20	10.16 ±0.20	15P	86.36 ±0.40	71.12 ±0.40
2P	20.32 ±0.20	5.08 ±0.10	14P	81.28 ±0.40	66.04 ±0.40
PIN	A	B	PIN	A	B

ITEM	Pitch	Mating
Standard	5.08	PF508
Alternate		

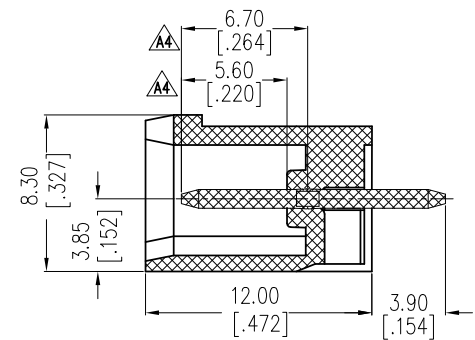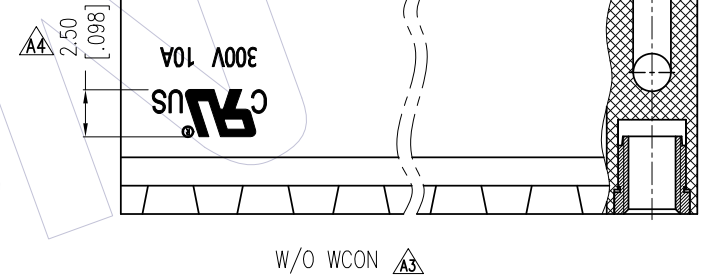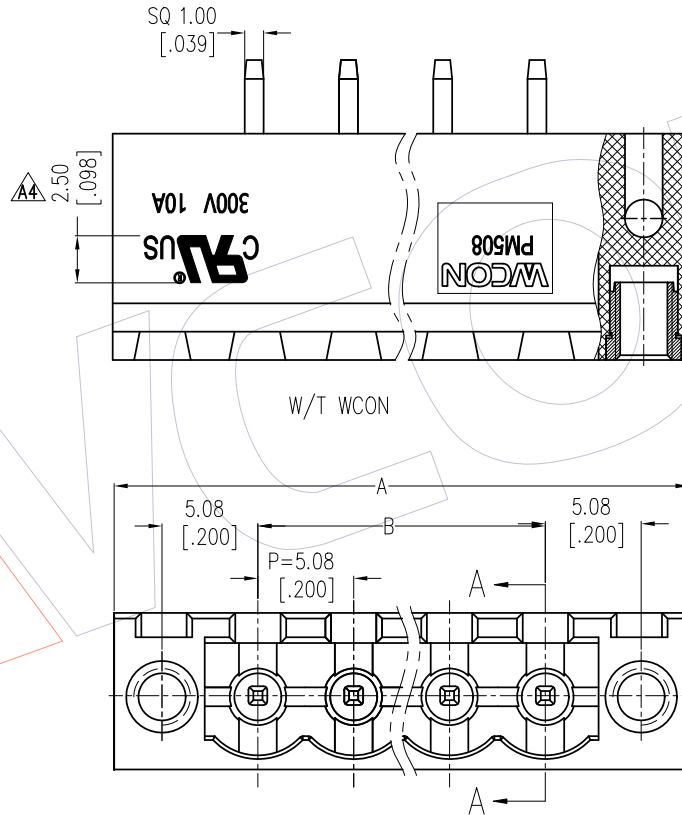

SECTION A-A

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

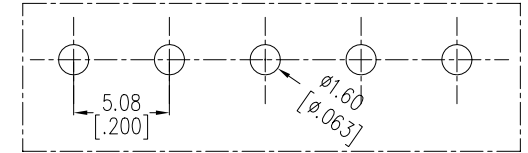

A4	2020/11/18	ADD UL LOGO & DIM	$\Delta 4$	XSR	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A3	2018/09/12	ADD W/O LOGO P/N	$\Delta 3$	XSR	X.X ±0.40	XSR	2020/11/18	UNIT	mm	PM508-1SXXXSM2(N) $\Delta 1$ $\Delta 3$
A2	2013/06/05	Modify The Housing Material	$\Delta 2$		X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2011/06/08	NEW			X.XXX ±0.15			SHEET	1/1	5.08mm Pitch Male
REV	DATE	MODIFICATION DESCRIPTION	CHANGE		Angle ± 3°	APPROVE	DATE	PROJ.		Pluggable Terminal Blocks
					DIM TOL					Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com