

HSF


NOTES:
 Rated Current:15 AMP
 Contact Resistance:8.0 milliohm Max
 Withstand Voltage:2000 V AC/DC
 Insulation Resistance:1000 Megohm min
 Operation Temperature:-40℃ to +105℃

Housing Material:PA66+30%GF(UL94V-0)
 Contact Material:Brass
 Terminal Plating:
 Matte Tin Plated Over Nickel




Ordering Information:

P M 750- 1 R XX A SM 2 N




M=Male Pitch 750=7.50 No.of Pins 02-20P Contact Plated SM=Matte Tin Series No. Blank=W/T WCON N=W/O WCON Color A=Green

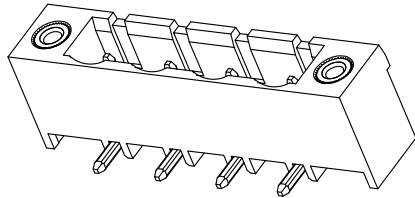

PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	7.50	25.50	12	82.50	100.50
03	15.00	33.00	13	90.00	108.00
04	22.50	40.50	14	97.50	115.50
05	30.00	48.00	15	105.00	123.00
06	37.50	55.50	16	112.50	130.50
07	45.00	63.00	17	120.00	138.00
08	52.50	70.50	18	127.50	145.50
09	60.00	78.00	19	135.00	153.00
10	67.50	85.50	20	142.50	160.50
11	75.00	93.00			

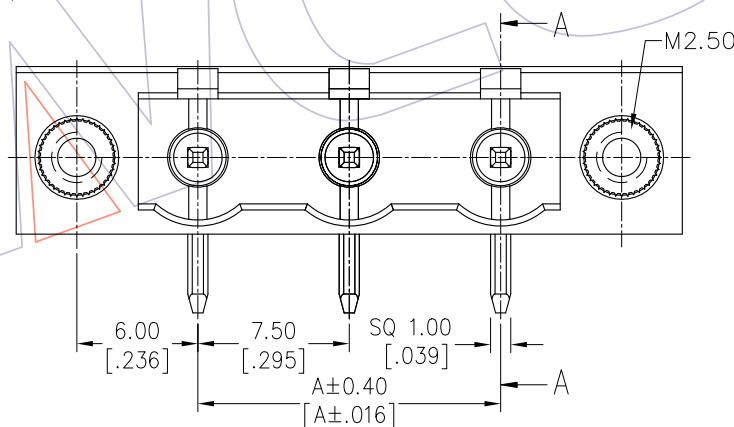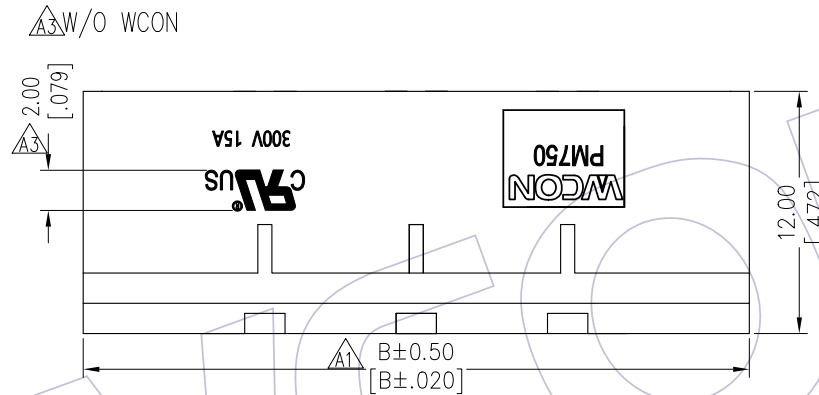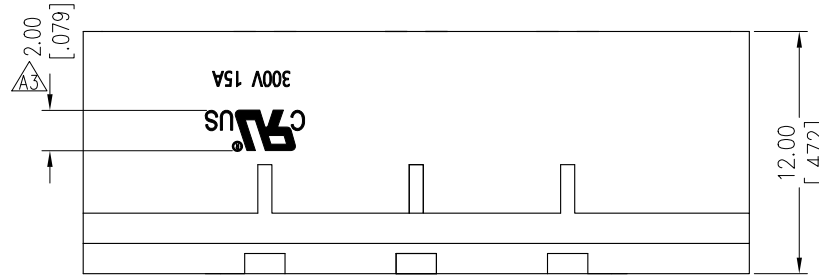

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

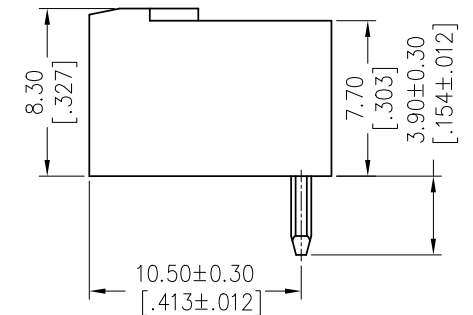

SECTION A-A

A3	2021/02/23	ADD UL Logo;ADD W/O WCON SPEC&P/N	XSR	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2020/10/31	ADD DIM.	XSR	X.X ±0.40	XSR	2021/02/23	UNIT	mm	PM750-1RXXASM2(N) A3
A1	2014/04/15	Modify	Allen	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2013/11/06	NEW		X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	7.50mm Pitch Male
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3°			PROJ.		Pluggable Terminal Blocks
				DIM TOL					Customer NO.

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com