

HSF

NOTES:
 Rated Current:15.0 AMP
 Contact Resistance:8.0 milliohm Max
 Withstand Voltage:2000 V AC/DC
 Insulation Resistance:1000 Megohm min
 Operation Temperature: -40℃ to +105℃


Housing Material:PA66+30%GF(UL94V-0)
 Contact Material:Brass
 Terminal Plating:
 Matte Tin Plated Over Nickel

Ordering Information:






P M 750- 1 S XX A SM 2 N

M=Male Pitch 750=7.50
 No.of Pins 02-20P
 Contact Plated SM=Matte Tin
 Color A=Green
 Series No. Blank=W/T WCON
 N=W/O WCON

PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	7.50	25.50	12	82.50	100.50
03	15.00	33.00	13	90.00	108.00
04	22.50	40.50	14	97.50	115.50
05	30.00	48.00	15	105.00	123.00
06	37.50	55.50	16	112.50	130.50
07	45.00	63.00	17	120.00	138.00
08	52.50	70.50	18	127.50	145.50
09	60.00	78.00	19	135.00	153.00
10	67.50	85.50	20	142.50	160.50
11	75.00	93.00			

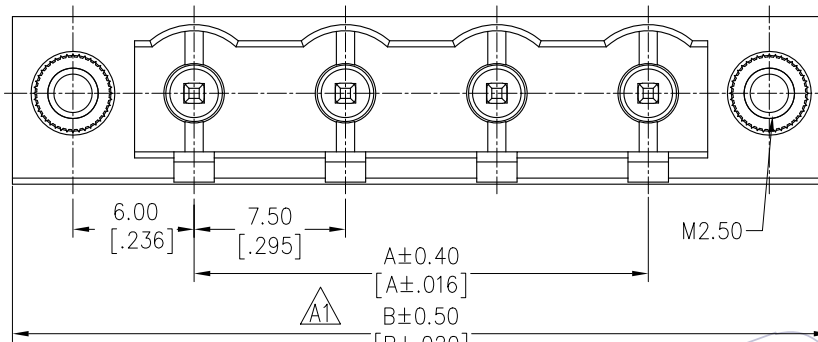

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

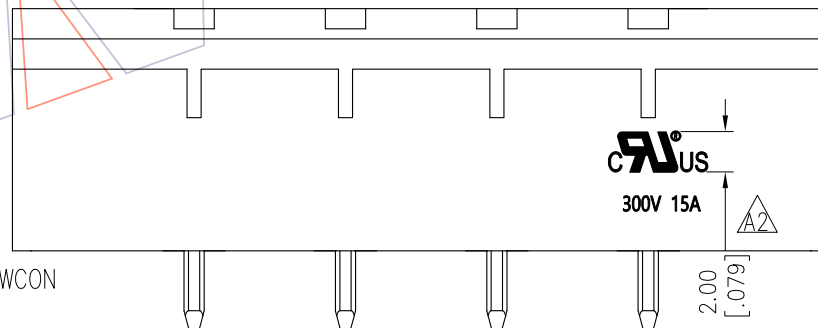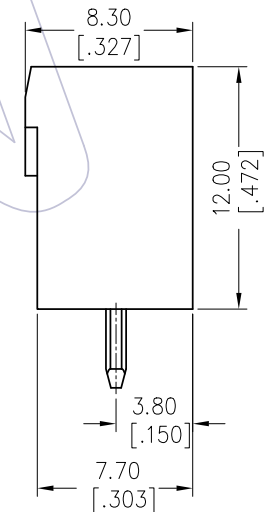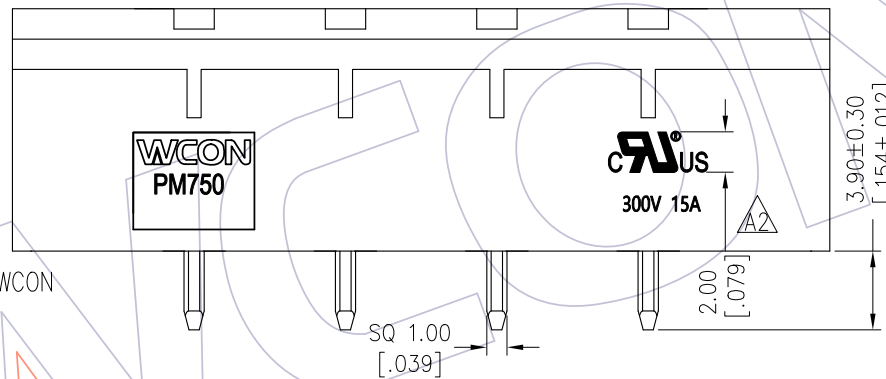

A2 W/O WCON

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.
A2	2021/02/23	ADD UL Logo;ADD W/O WCON SPEC&P/N	XSR	X.X ±0.40	XSR	2021/02/23	UNIT	mm	PM750-1SXXASM2(N) A2	7.50mm Pitch Male Pluggable Terminal Blocks	
A1	2014/04/15	Modify	Allen	X.XX ±0.25	CHECK	DATE	SIZE	inch			
A0	2013/11/06	NEW		X.XXX ±0.15	APPROVE	DATE	SHEET	1/1			
				Angle ± 3°			PROJ.				
				DIM TOL							

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com