


HSF

NOTES:

Rated Current:3.0AMP
Voltage Rating:250V AC/DC
Current Rating:2.5A AC/DC
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/Minute
Insulation Resistance:1000MΩ min
Operation Temperature:−40℃ to +105℃ **A4**
Insulator Material:PBT UL94V−0
Use with:WF2542−T
Mated With:WF2542−Wafer

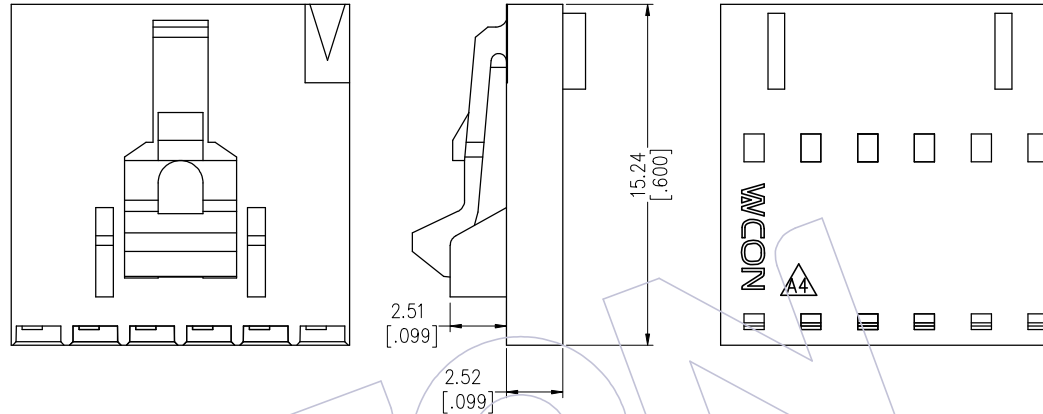



Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
02	WF2542−H02X01	2.54	4.98
03	WF2542−H03X01	5.08	7.52
04	WF2542−H04X01	7.62	10.06
05	WF2542−H05X01	10.16	12.60
06	WF2542−H06X01	12.70	15.14
07	WF2542−H07X01	15.24	17.68
08	WF2542−H08X01	17.78	20.22
09	WF2542−H09X01	20.32	22.76
10	WF2542−H10X01	22.86	25.30
11	WF2542−H11X01	25.40	27.84
12	WF2542−H12X01	27.94	30.38
13	WF2542−H13X01	30.48	32.92
14	WF2542−H14X01	33.02	35.46
15	WF2542−H15X01	35.56	38.00
16	WF2542−H16X01	38.10	40.54
17	WF2542−H17X01	40.64	43.08
18	WF2542−H18X01	43.18	45.62
19	WF2542−H19X01	45.72	48.16
20	WF2542−H20X01	48.26	50.70
21	WF2542−H21X01	50.80	53.24
22	WF2542−H22X01	53.34	55.78
23	WF2542−H23X01	55.88	58.32
24	WF2542−H24X01	58.42	60.86
25	WF2542−H25X01	60.96	63.40

Ordering Information

WF 2542 - H XX X 0 1 X

No.of pins
02pin~25pin
Color
B=Black
LOGO
W=WCON
Blank:Without/WCON LOGO
A3

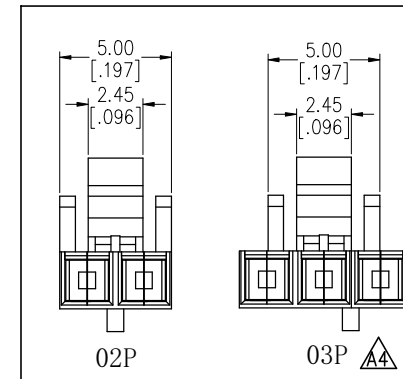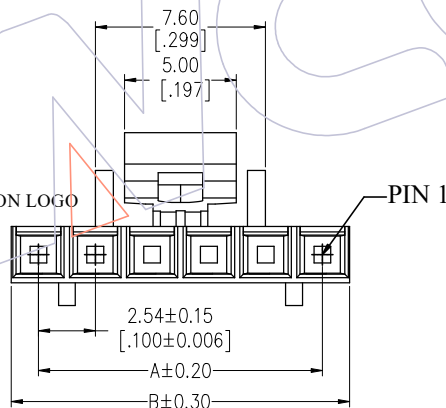

A4	2024/04/05	Modify 3P Drawing and Logo	CP	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	WCON Http: www.wcon.com WCON−Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON−Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
A3	2022/01/22	Add WCON LOGO	LZH	x.x ±0.40	CP	2024/04/05	UNIT	mm inch	SEE TAB	
A2	2020/08/17	Add Drawing	DUAN	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:	
AO	2012/09/07	NEW	—	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	2. 54mm CD-ROM WAFER HOUSING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle DIM TOL			PROJ.	1/1	Customer NO.	