



HSPF

NOTES:
 Rated Current: 7.0AMP
 Rated Voltage: 250V AC/DC
 Contact Resistance: 10mΩ max
 Withstand Voltage: 1000V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +105°C

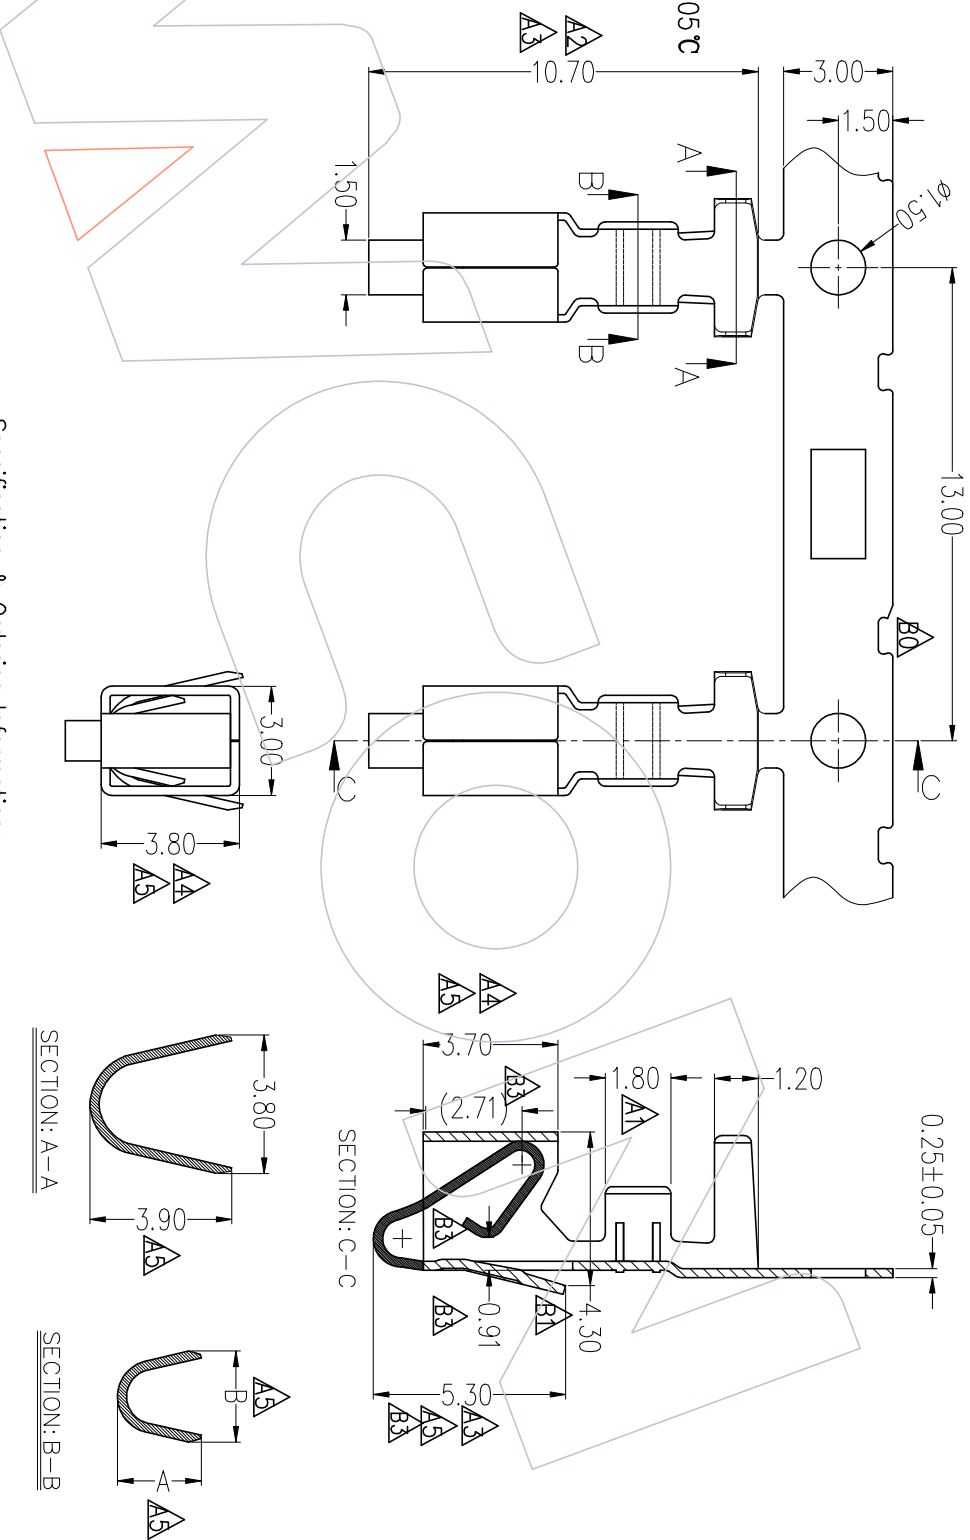

Ordering Information

WF 3963 - T P SN 0 X



Specification & Ordering Information:

| Part No. | Material | DIM A | DIM B | Wire Range | Insulation O.D | Qty/Reel |
|---------------|-----------------|-------|-------|------------|----------------|----------|
| WF3963-TPSN01 | Phosphor bronze | 2.30 | 2.50 | AWG#18~#20 | 1.70~2.05mm | 3,000PCS |
| WF3963-TPSN03 | Phosphor bronze | 1.60 | 1.71 | AWG#22~#24 | 1.38~1.63mm | 3,000PCS |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|-----|------------|--------------------------|--------|
| B3 | 2023/02/03 | OPTIMIZE FOR SPRING | — |
| B2 | 2022/11/23 | Modify,Add WF3963-TPSN03 | XX |
| B1 | 2019/02/27 | Modify | XXX |
| A0 | 2008/07/19 | NEW | XXXX |

| OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
|-----------|---------|------------|-------|-----|------------------------|
| ±0.40 | PAN | 2023/02/03 | mm | | WF3963-TPSN0X |
| ±0.25 | CHECK | DATE | UNIT | | TITLE: |
| ±0.15 | APPROVE | DATE | SIZE | A4 | VH 3.96 WAFER TERMINAL |
| ± 3° | PROJ. | DATE | SHEET | 1/1 | Customer NO. |



Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 WCON-Foshan Tel: +86 769 85358915
 WCON-Hangzhou Tel: +86 512 57468468