

Recommended P.C.B Layout(Top Side)

 $0.05)$

NOTES:

Current Rating: 1AMP

Contact Resistance: 30m Ω max

Withstand Voltage: 250V AC/DC

Insulation Resistance: 1000M Ω min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material: Phosphor

Bronze(C5191-H)

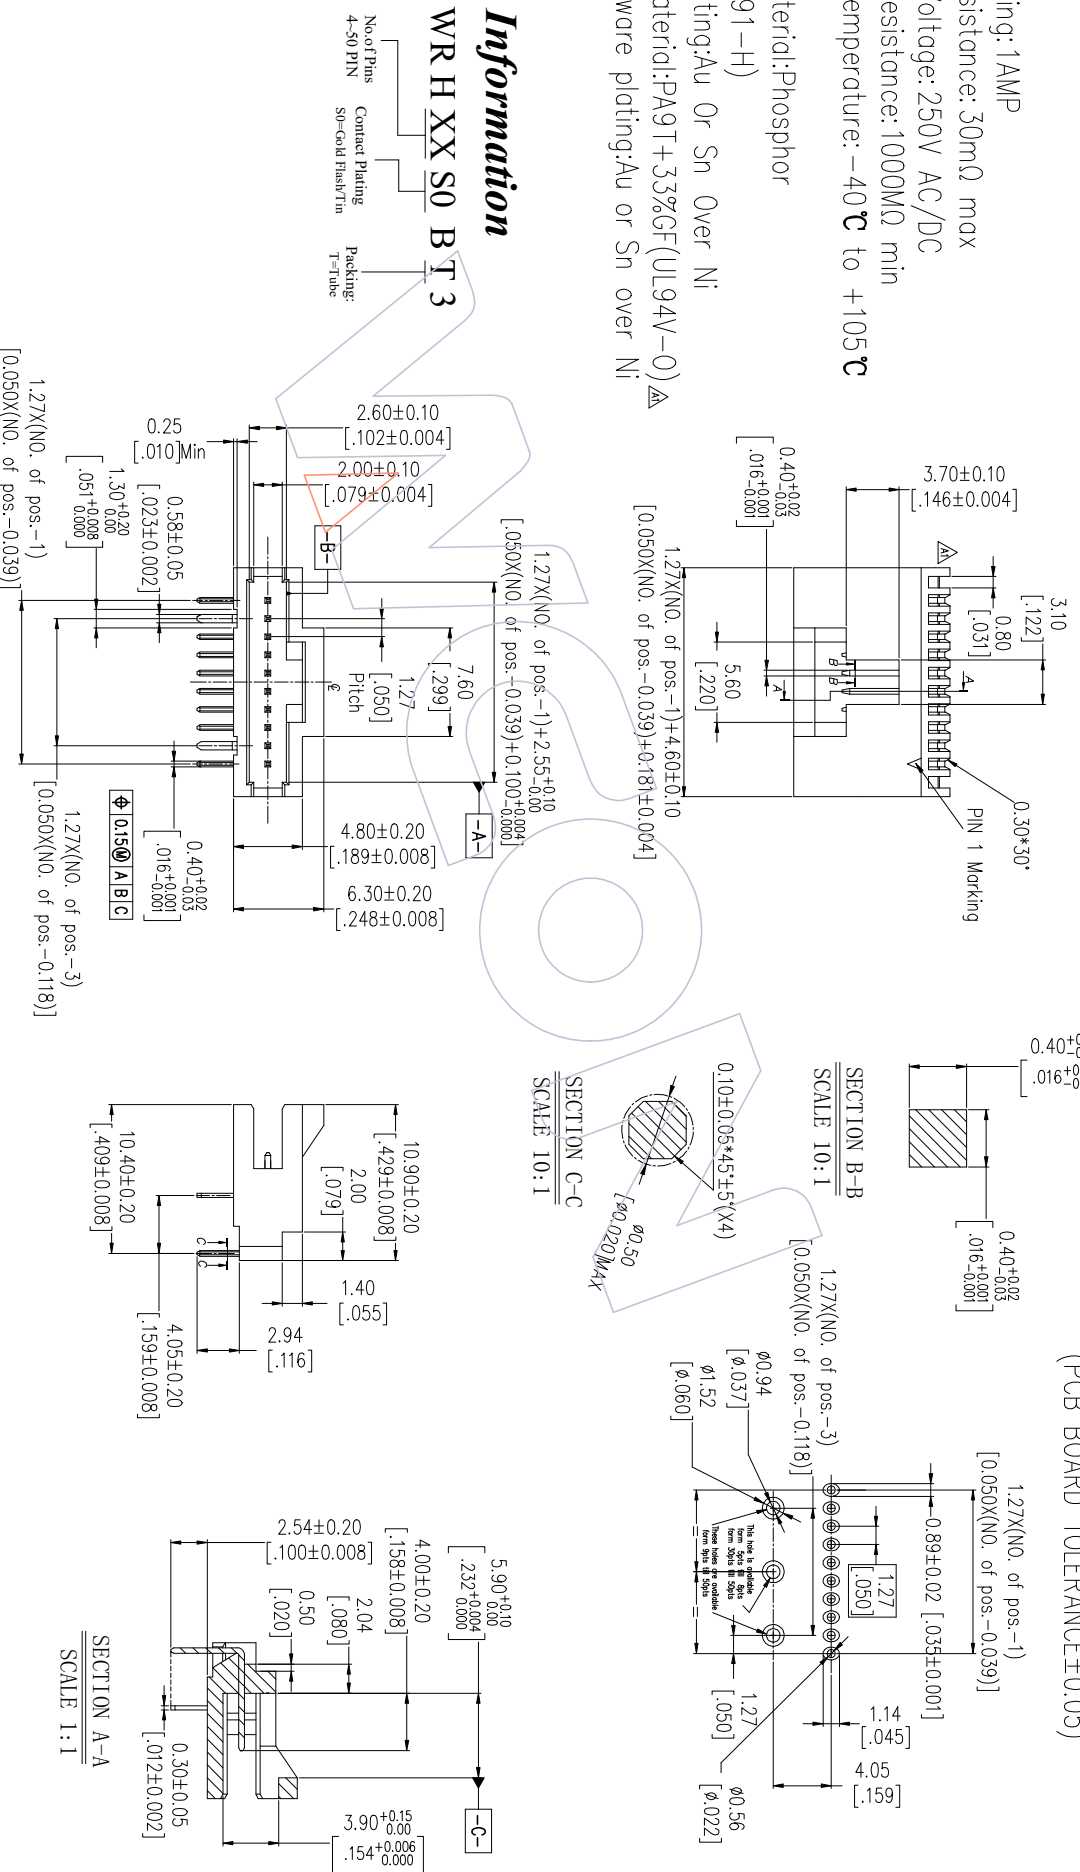
Contact plating: Au Or Sn Over Ni

Insulator Material: PA9T+33%GF(UL94V-0) Δ_{AT}

Fixing Hardware plating: Au or Sn over Ni Plating

Ordering Information

WF1271-1 WR H XX S0 BT 3

[illegible]