


HSF

NOTES:






Current Rating:2A-Max.
(Two by one contact energized,
AT 30℃ Rise, Room Temp21.0℃)
Voltage Rating:200V/AC
Contact Resistance:20mΩ Max.
Withstand Voltage:650V AC For 1Minute
Insulation Resistance:1000MΩ Min.
Operation Temperature:-55℃ to +125℃

Insulator Material:PA9T,G.F,UL94V-0,
Black or Nature
Contact Material:Copper Alloy
Contact plating:
Contact Area: XX u",Solder Area: 80u" Matte Tin Min.
Over 50u" Nickel


Recommended Process:
IR Stove,Peak temperature: 260±5℃



3D VIEW

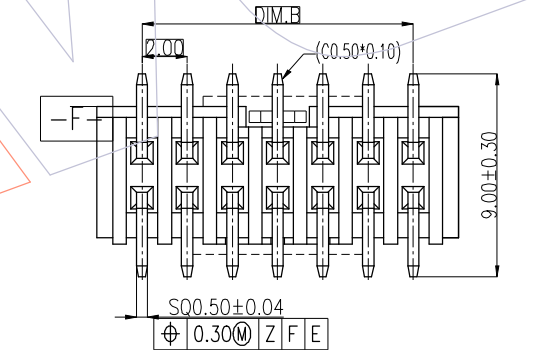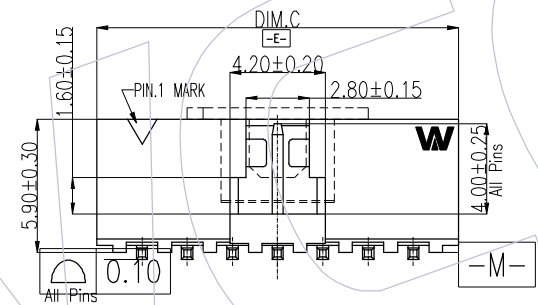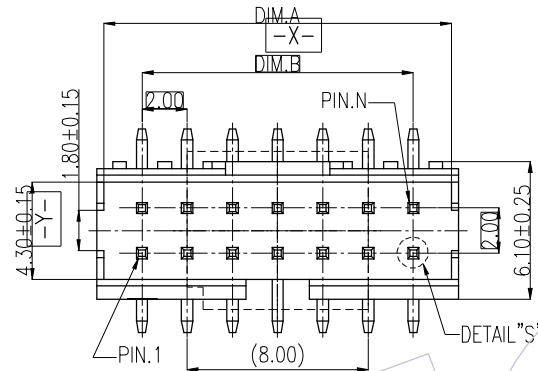

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)
PCB BOARD THICKNESS:1.6~2.0

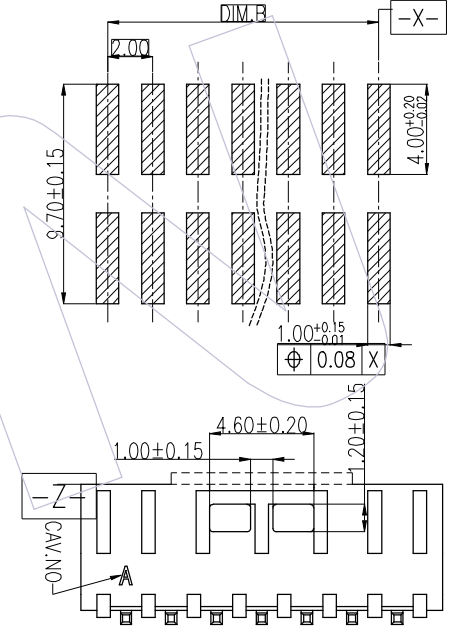

Ordering Information

Box Header: 31 22B- XX M XX X K00 X 1
2.00mm
PIN NO:
04=2*2
06=2*3
50=2*25
M=180°SMT
Terminal Plated:
W0:Sel 10u" AU/Matte Tin
W3:Sel 10u" AU/Matte Tin
W4:Sel 15u" AU/Matte Tin
W5:Sel 30u" AU/Matte Tin
Wcon Internal Code:
1~9
Packing:
P=Tube (W/T CAP)
T=Tube (W/O CAP)
R=Tape & Reel (W/T CAP)
K00=ALL PIN
Color:
B=Black
N=Nature


				OPERATION		DRAW Andrey	DATE 2022/02/24	SCALE	Fit	PART NO. 3122B-XXMXXXK00X1	 Http: www.wcon.com
				x.x	±0.40		CHECK	DATE	UNIT		
				x.xx	±0.25	APPROVE	DATE	SIZE	A4	2.00mm Box Header, Double Row, S/T SMT, H=5.90 F Type W/T Lock	
				x.xxx	±0.15			SHEET	1 / 2		
AO	2022/02/20	NEW RELEASE	Andrey	Angle	± 3°			PROJ.			WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL						

HSF


TABLE.1:

PIN NO.	DIM.	DIM.A&TOL.	DIM.B	DIM.C&TOL.	PIN NO.	DIM.	DIM.A&TOL.	DIM.B	DIM.C&TOL.	PIN NO.	DIM.	DIM.A&TOL.	DIM.B	DIM.C&TOL.
4P(2*2P)	5.40	±0.15	2.00	6.00	20P(2*10P)	21.40	±0.20	22.00	6.00	36P(2*18P)	37.40	±0.25	34.00	38.00
6P(2*3P)	7.40		4.00	8.00	22P(2*11P)	23.40		24.00	8.00	38P(2*19P)	39.40		36.00	40.00
8P(2*4P)	9.40		6.00	10.00	24P(2*12P)	25.40		26.00	10.00	40P(2*20P)	41.40		38.00	42.00
10P(2*5P)	11.40		8.00	12.00	26P(2*13P)	27.40		28.00	12.00	42P(2*21P)	43.40		40.00	44.00
12P(2*6P)	13.40		10.00	14.00	28P(2*14P)	29.40		30.00	14.00	44P(2*22P)	45.40		42.00	46.00
14P(2*7P)	15.40		12.00	16.00	30P(2*15P)	31.40		32.00	16.00	46P(2*23P)	47.40		44.00	48.00
16P(2*8P)	17.40		14.00	18.00	32P(2*16P)	33.40		34.00	18.00	48P(2*24P)	49.40		46.00	50.00
18P(2*9P)	19.40		16.00	20.00	34P(2*17P)	35.40		36.00	20.00	50P(2*25P)	51.40		48.00	52.00

* Remark: 2*2P,2*3P,2*4P Configuration

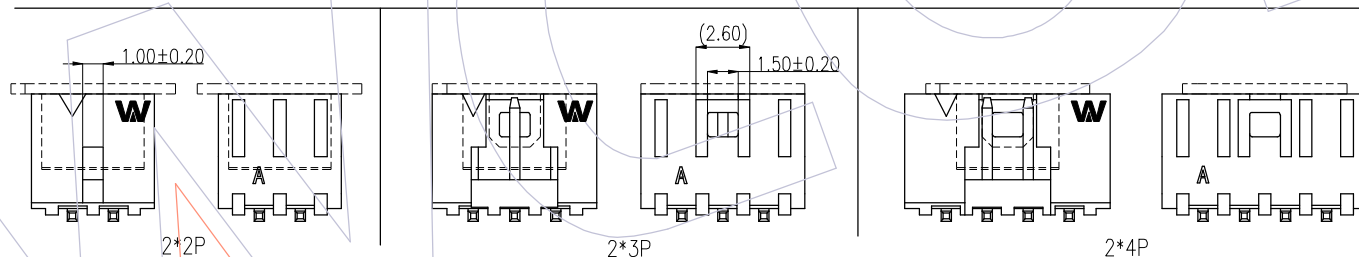

* Remark: 2*5P~2*25P Configuration

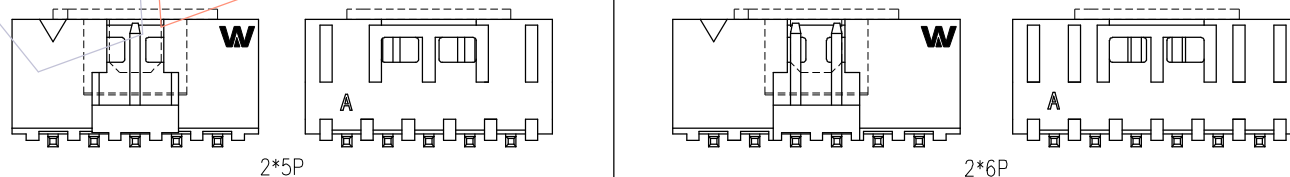

OPERATION

DRAW

DATE

SCALE

Fit

PART NO.

3122B-XXMXXXK00X1

x.x ±0.40

Andrey

2022/02/24

UNIT

mm

TITLE:

2.00mm Box Header, Double Row,
S/T SMT, H=5.90 F Type W/T Lock

x.xx ±0.25

CHECK

DATE

SIZE

A4

CUSTOMER NO.

x.xxx ±0.15

APPROVE

DATE

SHEET

2/2

Angle ± 3°

CHANGE

DATE

PROJ.

⌀

DIM

TOL

DATE

PROJ.

⌀

WCON

Http: www.wcon.com

WCON-Dongguan

Tel: +86 769 85358920

Fax: +86 769 85358915

E-mail: sales@wcon.com

WCON-Kunshan

Tel: +86 512 57468408

Fax: +86 512 57468468

E-mail: sales@wcon.com

AO 2022/02/20

NEW RELEASE

Andrey

REV DATE

MODIFICATION DESCRIPTION

CHANGE