

HSF

NOTES:

Rated Current: 3.0A (22#AWG)

Rated Voltage: 48V

Contact Resistance: 20mΩ max

Withstand Voltage: 550V AC/Minute


Insulation Resistance: 500MΩ min

Operation Temperature: -40℃ to +105℃

Insulator Material: PA66,GF,UL94V-0,BK

Contact Material: Copper Alloy

Contact Plating: Gold Flash Over Nickel

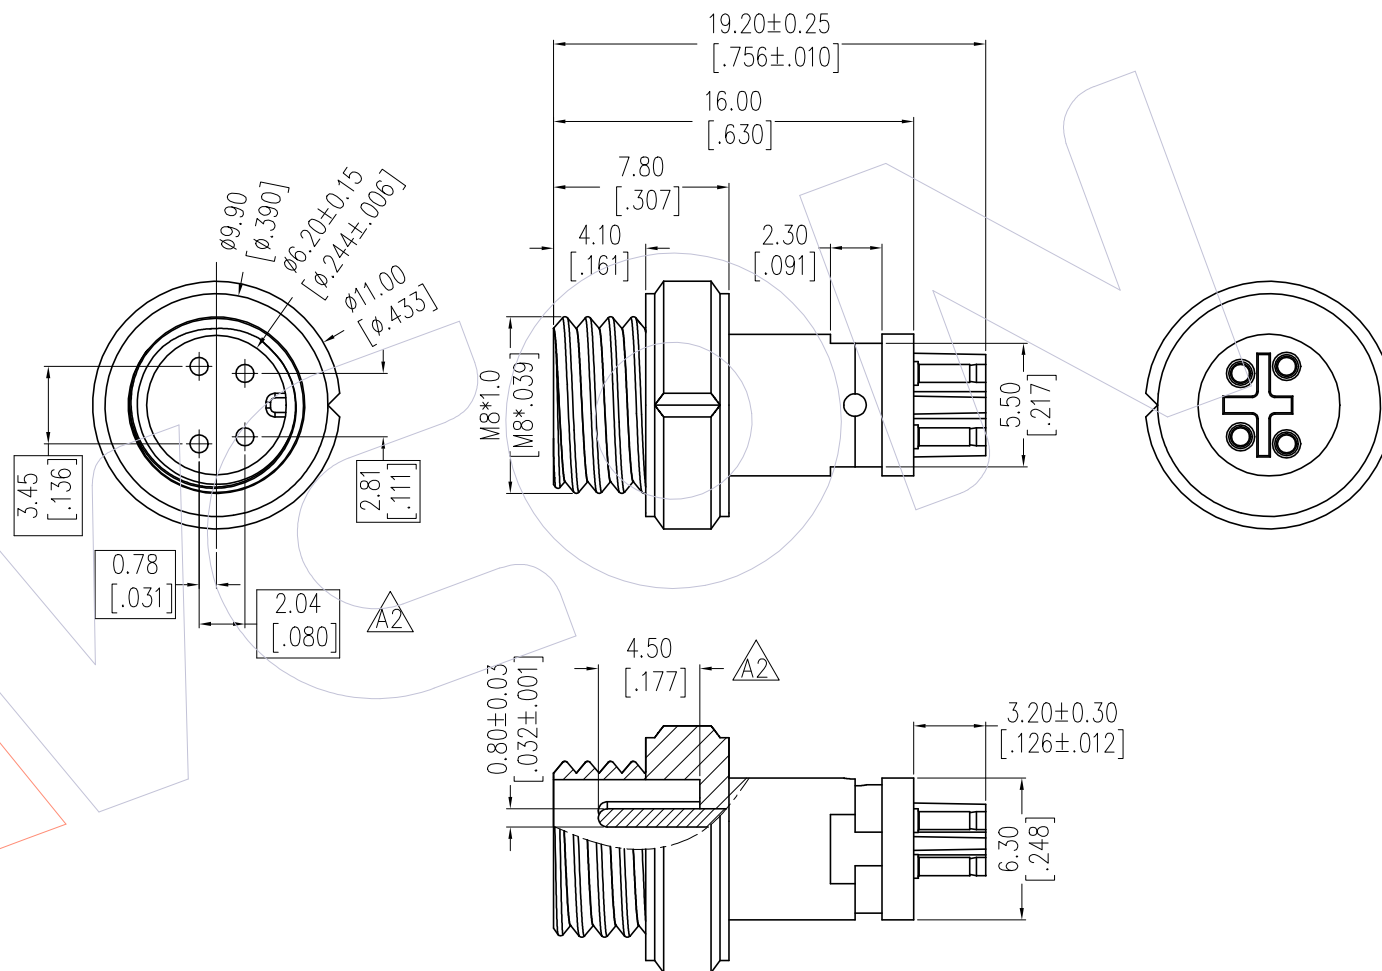

			OPERATION		DRAW	DATE	SCALE	FIT	PART NO.	WCON	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL						
A2	2024.09.18	UPDATE DIM	LYJ	x.x	±0.40	DreamsRain	2023.09.01	UNIT	mm [inch]	M08-11MSG0A0401	
A1	2024.01.16	Update P/N	ZhuJ	x.xx	±0.25	CHECK	DATE	SIZE	A4		
AO	2023.09.01	NEW	-----	Angle	± 3°	APPROVE	DATE	SHEET	1/1	M8 Circular connector Male	
								PROJ.			
Customer NO.										WCON-Dongguan	
										WCON-Kunshan	
										Tel: +86 769 85358920	
										Tel: +86 512 57468408	
										Fax: +86 769 85358915	
										Fax: +86 512 57468468	
										E-mail: sales@wcon.com	
										E-mail: salesks@wcon.com	